




# GQ BEARING PROCESSING LTD

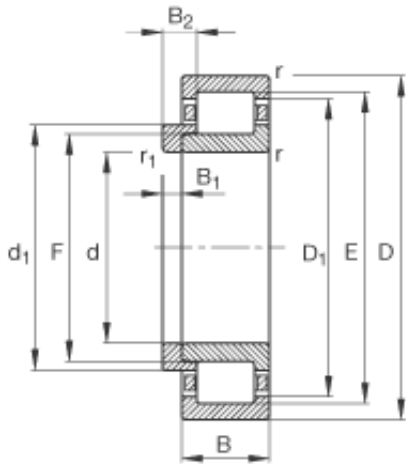

## 65 mm x 120 mm x 31 mm FAG NJ2213-E-TVP2 + HJ2213-E cylindrical roller bearings

Bearing No. NJ2213-E-TVP2 + HJ2213-E

NJ2213-E-TVP2 + HJ2213-E Bearing 2D drawings and 3D CAD models

Size	65x120x31 mm
Bore Diameter	65 mm
Outer Diameter	120 mm
Width	31 mm
d	65 mm
D	120 mm
B	31 mm
B <sub>1</sub>	6 mm
B <sub>2</sub>	10,5 mm
D <sub>1</sub>	104,3 mm
D <sub>a max</sub>	111 mm
d <sub>1</sub>	84,4 mm
d <sub>a max</sub>	77 mm
d <sub>a min</sub>	74 mm
d <sub>c min</sub>	87 mm
E	108,5 mm
F	78,5 mm
r <sub>1 min</sub>	1,5 mm
r <sub>a max</sub>	1,5 mm
r <sub>min</sub>	1,5 mm
s	1,9 mm / Axial displacement facility from central position
- HJ2213-E / Designation, L-section ring	HJ2213E / Designation, Lsection ring



## GQ BEARING PROCESSING LTD

$m$	1,46 kg / Weight
$m_1$	0,13 kg
$C_r$	177000 N / Dynamic load rating (radial)
$C_{0r}$	182000 N / Static load rating (radial)
$n_G$	7100 1/min / Limiting speed
$n_B$	4150 1/min / Reference speed
$C_{ur}$	33000 N / Fatigue limit load, radial